

Errata for 2018 Uniform Mechanical Code – 2nd Printing

The following are changes that we found after the second printing of the 2018 Uniform Mechanical Code. These changes may apply to your code book. Thank you.

Chapter 3

Table 303.10.1 – Revise the seventh column on item (6) on Table 303.10.1, from 3 to 5.

TABLE 303.10.1
REDUCTION OF CLEARANCES WITH SPECIFIED FORMS OF PROTECTION^{1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11}
[NFPA 54: TABLE 10.2.3]

TYPE OF PROTECTION APPLIED TO AND COVERING ALL SURFACES OF COMBUSTIBLE MATERIAL WITHIN THE DISTANCE SPECIFIED AS THE REQUIRED CLEARANCE WITH NO PROTECTION	WHERE THE REQUIRED CLEARANCE WITH NO PROTECTION FROM APPLIANCE, VENT CONNECTOR, OR SINGLE-WALL METAL PIPE IS:									
	36 (INCHES)		18 (INCHES)		12 (INCHES)		9 (INCHES)		6 (INCHES)	
	ALLOWABLE CLEARANCES WITH SPECIFIED PROTECTION (INCHES)									
	USE COLUMN 1 FOR CLEARANCES ABOVE APPLIANCE OR HORIZONTAL CONNECTOR. USE COLUMN 2 FOR CLEARANCES FROM APPLIANCES, VERTICAL CONNECTOR, AND SINGLE-WALL METAL PIPE.									
	ABOVE (COLUMN 1)	SIDES AND REAR (COLUMN 2)	ABOVE (COLUMN 1)	SIDES AND REAR (COLUMN 2)	ABOVE (COLUMN 1)	SIDES AND REAR (COLUMN 2)	ABOVE (COLUMN 1)	SIDES AND REAR (COLUMN 2)	ABOVE (COLUMN 1)	SIDES AND REAR (COLUMN 2)
(6) ½ of an inch thick insulation board with ventilated air space	18	12	9	6	6	4	5	3	3	3

(portion of table not shown remains unchanged)

12/3/18

Chapter 8

Figure 802.8 – Revise the following sections on the figure below: Section 509.8 to Section 802.8, Section 509.8.1 to Section 802.8.1 and Section 509.8.2 to Section 802.8.2.

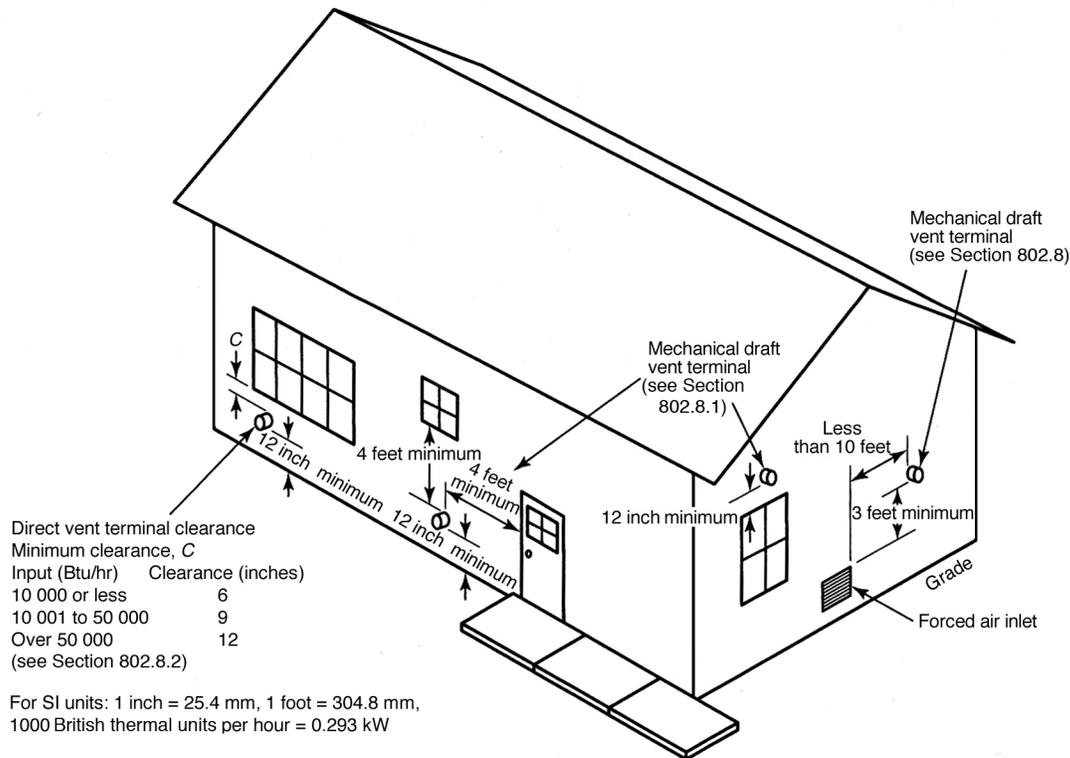


FIGURE 802.8
EXIT TERMINALS OF MECHANICAL DRAFT AND DIRECT-VENT VENTING SYSTEMS
[NFPA 54: FIGURE A.12.9]

08/29/18